

MULTI EVO-E

SINGLE PHASE - FREQUENCY CONVERTER

- High reliability - thanks to the durable and innovative design
- Quiet operation - improved user comfort thanks to its quiet operation
- Compact dimensions
- Many possible uses for the residential market
- Excellent priming capacity



DESCRIPTION


The system consists of a multi-stage centrifugal horizontal pump Multi EVO-E and an electronic control system (inverter) which allows to keep the pressure constant in the system, reducing or increasing the speed of rotation of the pump.

All models are certified for use with drinking water (ACS)

APPLICATIONS

- Pressurization and supply
- Irrigation
- Use of rainwater
- Washing systems

PERFORMANCE

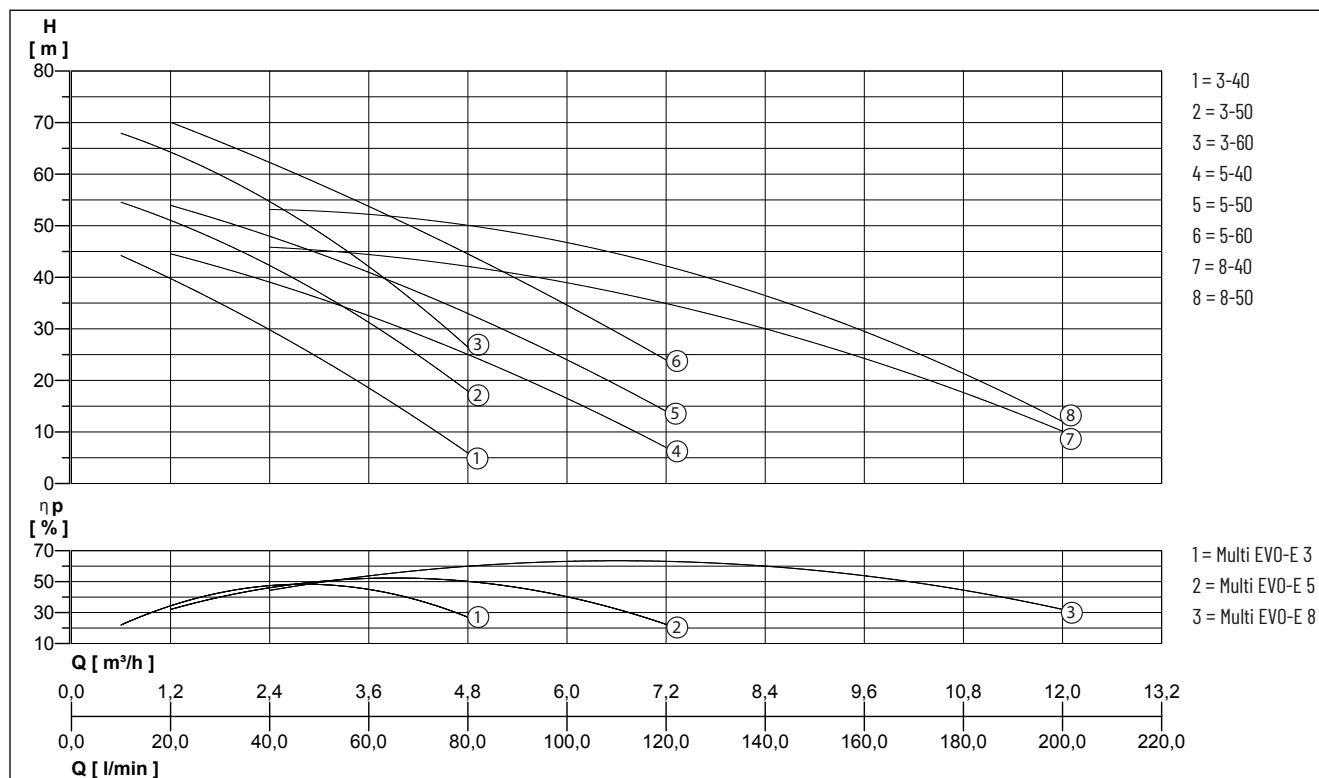

We reserve the right to change specifications without notice. Pump performance is subject to ISO 9906 ISO 9906:2012 - Grade 3B tolerances.

MULTI EVO-E

SINGLE PHASE - FREQUENCY CONVERTER

Type	Flow rate Q [m³/h]	0.6	1.2	1.8	2.4	3	3.6	4.8	6	7.2	8.4	9.6	10.8	12
MULTI EVO-E 3-40	Delivery head H [m]	44.0	40.0	35.0	30.0	24.0	18.5	6.0						
MULTI EVO-E 3-50		54.5	51.0	47.0	42.5	37.0	31.0	18.0						
MULTI EVO-E 3-60		68.0	64.0	60.0	55.0	48.5	42.0	26.5						
MULTI EVO-E 5-40			44.5	42.0	39.0	36.0	32.5	25.0	16.5	7.0				
MULTI EVO-E 5-50			54.0	51.0	48.0	44.5	41.0	33.0	24.0	14.0				
MULTI EVO-E 5-60			70.0	66.5	62.0	58.0	54.0	44.5	34.5	24.0				
MULTI EVO-E 8-40					46.0	45.0	44.5	42.0	39.0	35.0	30.0	24.0	18.0	10.0
MULTI EVO-E 8-50					54.0	53.0	52.0	49.0	46.0	42.0	36.5	30.5	23.5	16.5

MECHANICAL DATA


Shaft	Stainless steel Europe: EN10088-1 X5CrNi18-10 (1.4301) USA: AISI 304	Mechanical seal Counterface Operating pressure max. Type of liquid	Carbon graphite / NBR / SS Ceramic / NBR 8 bar clean water without suspended solids or abrasive material
Impeller	PP0 reinforced with fibreglass	Temperature of the liquid max.	50 °C
Motor housing	Die-cast aluminium	Suction height max	6 m
Pump housing	Stainless steel Europe: EN10088-1 X 5 CrNi 1810 (1.4301) USA: AISI 304	Gasket	NBR 70 Shore A
Diffuser	PP0 reinforced with fibreglass		

ELECTRICAL DATA

Voltage	1/N/PE~230 V	Ambient temperature max.	40 °C
Type of enclosure	IP 55	Rotation speed	2850 rpm
Insulation class	F		

MULTI EVO-E

Type	Code No.	Motor rating P1	P2	Current	Weight
MULTI EVO-E 3-40	N42E2540	0.80 kW	0.50 kW	5.1 A	10.0 kg
MULTI EVO-E 3-50	N42E2151	1.00 kW	0.75 kW	7.0 A	12.1 kg
MULTI EVO-E 3-60	N42E2162	1.35 kW	0.95 kW	8.7 A	13.4 kg
MULTI EVO-E 5-40	N42E4140	1.00 kW	0.75 kW	7.0 A	12.2 kg
MULTI EVO-E 5-50	N42E4151	1.25 kW	0.90 kW	8.5 A	13.0 kg
MULTI EVO-E 5-60	N42E4162	1.80 kW	1.30 kW	11.5 A	14.5 kg
MULTI EVO-E 8-40	N42E7140	1.70 kW	1.20 kW	11.0 A	15.0 kg
MULTI EVO-E 8-50	N42E7151	2.00 kW	1.40 kW	13.0 A	16.7 kg

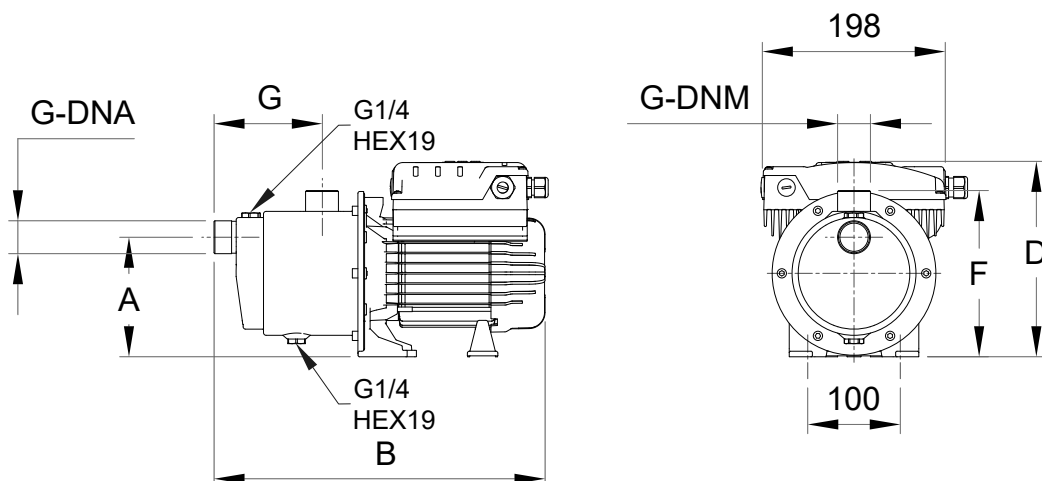

MULTI EVO-E

SINGLE PHASE - FREQUENCY CONVERTER

DIMENSIONS [mm]

Type	A	B	C	D	F	G	DNA	DNM	E
MULTI EVO-E 3-40	129	360	100	211	180	116	1"	1"	198
MULTI EVO-E 3-50	129	377	100	220	180	116	1"	1"	198
MULTI EVO-E 3-60	129	377	100	220	180	116	1"	1"	198
MULTI EVO-E 5-40	125	380	100	220	180	119	1 1/4"	1"	198
MULTI EVO-E 5-50	125	380	100	220	180	119	1 1/4"	1"	198
MULTI EVO-E 5-60	125	413	100	230	180	119	1 1/4"	1"	198
MULTI EVO-E 8-40	125	430	100	230	187	137	1 1/4"	1 1/4"	198
MULTI EVO-E 8-50	125	430	100	230	187	137	1 1/4"	1 1/4"	198

MULTI EVO-E

SINGLE PHASE - FREQUENCY CONVERTER